

POS

PA-6970

High Performance 15" POS Terminal

Features and Benefits:

- High Performance Intel i3-2120 3.3GHz
- 15" True Flat Touch Screen
- Bezel Free Front Panel
- All-in-One Slim Panel PC
- Optional MSR / i-Button / Fingerprint / VFD / 2nd Display
- Optional integrated Wireless LAN / RFID
- Panel PC Wall-mountable VESA 100 x 100 Standard



Protech Systems Co., Ltd.

No. 24, Lane 365, Yang Goang Street, Nei Hu District Taipei 114, Taiwan
TEL: +886-2-8751-1111 FAX: +886-2-8751-1199
E-mail: sales@protech.com.tw
<http://www.protech.com.tw>

Protech Technologies Inc.

950 Fee Ana St, Suite B Placentia, CA 92870
TEL: +1-714- 996-7200 FAX: +1-714- 996-7300
Sales: sales@protech-usa.net
<http://www.protech-usa.net>

Protech Japan Co., Ltd.


OSK Bldg, 6F, 6-25-14, Minami-ohi Shinagawa-ku, Tokyo, 140-0013
TEL: +81-3-5753-8411 FAX: +81-3-3763-9282
E-mail: sam@protech-j.com
<http://www.protech-j.com>




ISO CERTIFIED
9001 14001

PA-6970 High Performance 15" POS Terminal

Front View

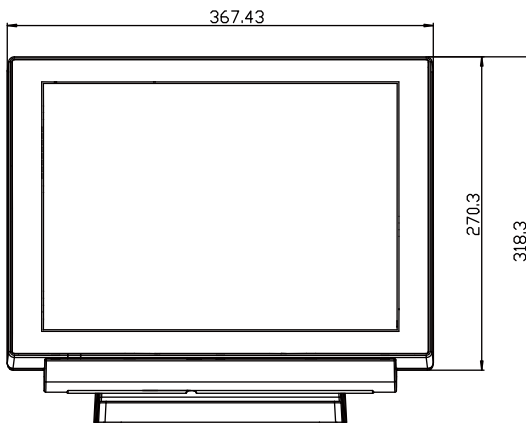

Side View

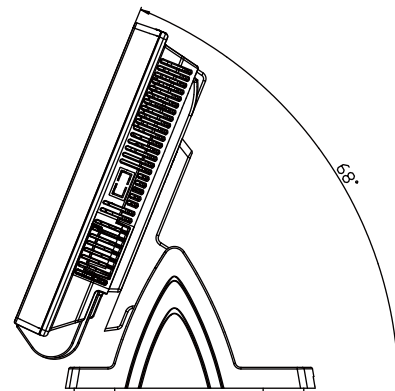

Unit: mm

Specification

System	
CPU Support	Intel® CPU series Core i3-2120 3.3 GHz, L2 Cache-3MB Pentium G850 2.9GHz, L2 Cache-3MB Celeron G540 2.4GHz, L2 Cache-2MB
Memory	1 x DDR3 SO-DIMM Slot (up to 4GB)
Core Logic	Intel® H61
Network	10/100/1000 Base-T Fast Ethernet
Power Supply	120 Watt power adaptor
System Weight	6.6 kg
Dimension (W x H x D)	367 x 318 x 259 mm
O.S. Support	POSReady 2009 / POSReady 7 / WES 2009 / WES 7 / Windows XP Pro / Windows 7

Storage

HDD	1 x 2.5" SATA HDD
SSD	1 x Optional 2.5" SATA SSD

I/O Ports

USB	4 x USB 2.0 ports / 1 x USB 2.0 on side bezel
Serial Ports	3 x DB-9 (COM 2/3/4), 1 x RJ45 (COM 1), +5V/12V selectable
PS/2	1 x PS/2 ports (default at keyboard)
LAN	1 x RJ-45
VGA	1 x DB-15 VGA interface
Cash Drawer	1 x RJ11 (+12V or +24V selectable)(default at +24V)
AC in	For power cord plug
Line out	1 x phone jack

Display

LCD	15" TFT LCD
Max. Resolution	1024 x 768
Brightness	250 cd/m ²
Touch Screen	5-wire Analog resistive
Tilt Angle	0 ~ 68 degrees

Environment

EMC & Safety	CE / FCC
Operating Temp.	0 ~ 35° C
Storage Temp.	-20 ~ 60° C
Humidity	20 ~ 90%

Ordering Information

PA-6970RB-A1B	15" 5-Wire True Flat Resistive Touch POS Terminal Barebone
52-210-73100027	Intel Core i3-2120 Processor,3.3GHz,3MB Cache
PA-6970RZ-22A	DDR3 2GB Memory/ 320GB 2.5" HDD
PA-6970RZ-41B	Vacuum Fluorescent Display, 20 columns and 2 lines, each column is 5 x 7 dots
PA-6970RZ-35B	ID-TECH ISO Track1+2+3
PA-6970RZ-43B	10.4" 2nd display (resolution 800*600)
PA-3100RZ-81A	Mini PCIe Wireless LAN Module 802.11 b/g
Color	Black
OS	POSReady 2009 / POSReady 7 / Windows XP / Windows 7

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Sep. 2012.